



5DA36251

Appliance colour: silver metallic

Slimline extractor hood, 60 cm



5DA36251 Silver metallic

Variant:

Operating and power:

Comfort:

Environment and safety:

Technical information:

Measures:

- Energy Efficiency Class: C
- Average Energy Consumption: 63.7 kWh/year
- Blower Efficiency Class: C*
- Lighting Efficiency Class: E
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 60/65 dB
- Slimline extractor hood
- 60 cm wide
- Install into a 60cm wide wall cupboard
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit (accessory) needed
- 2-stage fan power adjustable by rocker switches
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back
- Drawer without handle, furniture lighting pelmet or profile panel required
- Bright illumination with 2 x 20 W halogen lights
- Light Intensity: 403 lux
- Colour Temperature: 2700 K
- Light Colour: warm white
- Metal grease filter, dishwasher safe
- Air volume according to EN 61591:
 - Extraction rate max. 340 m³/h
 - Recirculating rate max. 180m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max.:
 - Extraction rate: 65 dB(A) re 1 pW (51 dB(A) re 20 µPa sound pressure)
 - Recirculating rate: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Power rating: 130 W
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions (HxWxD): 203 x 598 x 290 mm
- built-in dimensions (HxWxD): 162 x 526 x 290 mm

Optional accessories

5Z5145X5 Recirculating kit


5Z5760N0 Handle strip

4251003100952

5DA36251


Appliance colour: silver metallic

Slimline extractor hood, 60 cm

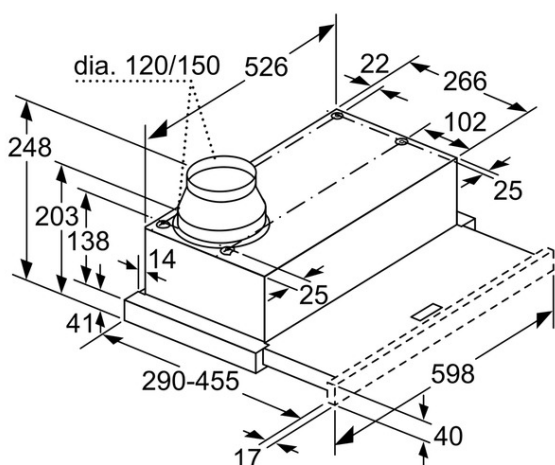

Not possible to adjust the depth of the filter pull-out

measurements in mm

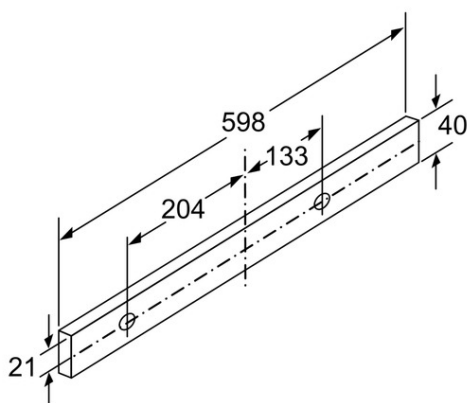

measurements in mm

Characteristics

Typology: Pull-out
 Approval certificates: CE, VDE
 Length electrical supply cord (cm): 175
 Required niche size for installation (HxWxD): 162mm x 526mm x 290mm
 Net weight (kg): 8.0
 Type of control: mechanical
 Number of speed settings: 2
 Maximum output air extraction (m³/h): 270
 Maximum output recirculating air (m³/h): 180
 Number of lights: 2
 Noise level (dB): 65
 Diameter of air outlet (mm): 150 / 120
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Convertible
 Optional accessories: 5Z5145X5, 5Z5760N0
 Type of lamps used: Halogen
 Total power of the lamps (W): 40
 Grease filter type: Kassette

Consumption and connection features

Connection Rating (W): 130
 Current (A): 10
 Voltage (V): 220-240
 Frequency (Hz): 50
 Plug type: Gardy plug w/ earthing
 Installation typology: Half-integrated
 Universal Product Code:
 Material body: zinc plated
 Approval certificates: CE, VDE
 Length of electrical supply cord (in):
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in): / x x
 Dimensions of the packed product (in): 12.20 x 25.19 x 14.17
 Height of the chimney (in):
 Vertical rise height:
 Required distance above cooktop/ranges:
 Net weight (lbs): 17
 Gross weight (lbs): 20
 Motor location: Integrated motor in hood body
 Maximum output recirculating air (CFM):
 Diameter of air duct (in) top:
 Diameter of air duct (in) back:
 Discharge direction:
 No-return airflow flap: No
 Length electrical supply cord (cm): 175
 Dimensions of the product, with chimney (if exists) (mm): 203 x 598 x 290
 Height of the chimney (in):
 Net weight (kg): 8.0