



5DA36450

Appliance colour: silver metallic

Slimline extractor hood, 60 cm



#### **5DA36450 Silver metallic**

##### **Variant:**

##### **Operating and power:**

##### **Comfort:**

##### **Environment and safety:**

##### **Technical information:**


##### **Measures:**

- Energy Efficiency Class: A+
- Average Energy Consumption: 17.9 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 53/59 dB
- Slimline extractor hood
- 60 cm wide
- Install into a 60cm wide wall cupboard
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit (accessory) needed
- Electronic controls
- Extraction rate 4 step (3 speeds plus intensive setting), adjustable through Push button controls with Electronic display
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- Efficient BLDC-technology
- Drawer without handle, furniture lighting pelmet or profile panel required
- Bright illumination with 1 x 3W LED modul
- Light Intensity: 468 lux
- Colour Temperature: 3500 K
- Light Colour: neutral white
- Metal grease filter, dishwasher safe
- Air volume according to EN 61591:
  - extraction rate:
    - max. normal use 270 m<sup>3</sup>/h, intensive 420 m<sup>3</sup>/h
  - recirculating rate:
    - max. normal use 160 m<sup>3</sup>/h, intensive 170 m<sup>3</sup>/h
- Noise level according to EN 60704-3 und EN 60704-2-13
  - Extraction rate:
    - Max. normal use: 59 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
    - Intensive: 69 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
  - Recirculating rate:
    - Max. normal use: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
    - Intensive: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)

5DA36450

Appliance colour: silver metallic

Slimline extractor hood, 60 cm

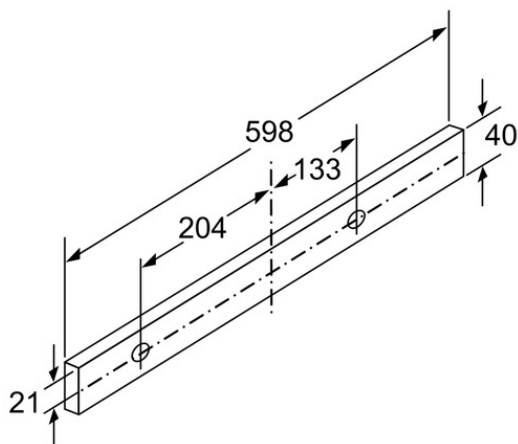

measurements in mm

## **Characteristics**

Typology: Pull-out

Approval certificates: CE, VDE

Length electrical supply cord (cm): 175

Required niche size for installation (HxWxD): 162mm x 526mm x 290mm

Net weight (kg): 8.0

Type of control: Electronic

Number of speed settings: 3

Maximum output air extraction (m<sup>3</sup>/h): 270

Boost position output recirculating (m<sup>3</sup>/h): 170

Maximum output recirculating air (m<sup>3</sup>/h): 160

Boost position air extraction (m<sup>3</sup>/h): 420

Number of lights: 1

Noise level (dB): 59

Diameter of air outlet (mm): 150 / 120

Grease filter material: Washable aluminium

Odour filter: No

Operating Mode: Convertible

Delay Shut off modes: 10M

Optional accessories: 5Z5145X5, 5Z5760N0

Type of lamps used: LED

Total power of the lamps (W): 3

Grease filter type: Kassette

## **Consumption and connection features**

Connection Rating (W): 73

Current (A): 10

Voltage (V): 220-240

Frequency (Hz): 60; 50

Plug type: Gurdy plug w/ earthing

Installation typology: Half-integrated

Universal Product Code:

Material body: zinc plated

Approval certificates: CE, VDE

Length of electrical supply cord (in):

Plug type: Gurdy plug w/ earthing

Dimensions of the product, with chimney (if exists) (in): / x x

Dimensions of the packed product (in): 12.20 x 25.19 x 14.17

Height of the chimney (in):

Vertical rise height:

Required distance above cooktop/ranges:

Net weight (lbs): 17

Gross weight (lbs): 21

Motor location: Integrated motor in hood body

Maximum output recirculating air (CFM):

Diameter of air duct (in) top:

Diameter of air duct (in) back:

Discharge direction:

No-return airflow flap: No