




5RF64351 stainless steel  
60 cm, Ceramic hob  
Frame design

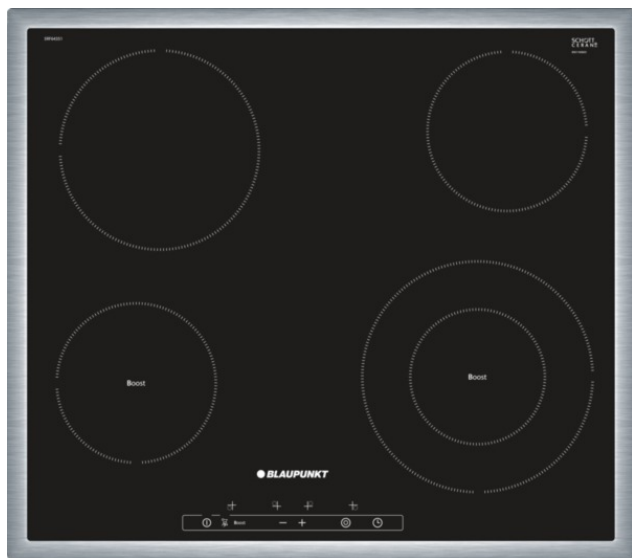

#### **5RF64351 Black**

##### **Design:**

- Frame design
- Ceramic glass

##### **Comfort:**

- 4 HighSpeed cooking zones, including:
- 1 dual zone
- Zone extension activation with a Touch sensor on the hob
- TouchControl MultiTouch
- Electronic display
- 17 power levels
- Switch off timer for every cooking zone
- Timer
- Re Start function
- Wipe protection function

##### **Environment+safety:**

- Main switch
- Power on indicator light
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Individual tunable energy consumption display

##### **Quickness:**

- PowerBoost function


##### **Measurements:**

- Min. worktop thickness: 20 mm
- connecting value 7400 W
- Cooking zones
  - front left: Ø 145 mm, 1.2 KW (max. power level 1.6 KW);
  - rear left: Ø 180 mm, 2 KW
  - rear right: Ø 145 mm, 1.2 KW
  - front right: Ø 120 mm, 210 mm, 0.8 KW, 2.1 KW (max. power level 2.6 KW);

4251003101249



## 5RF64351 stainless steel 60 cm, Ceramic hob Frame design

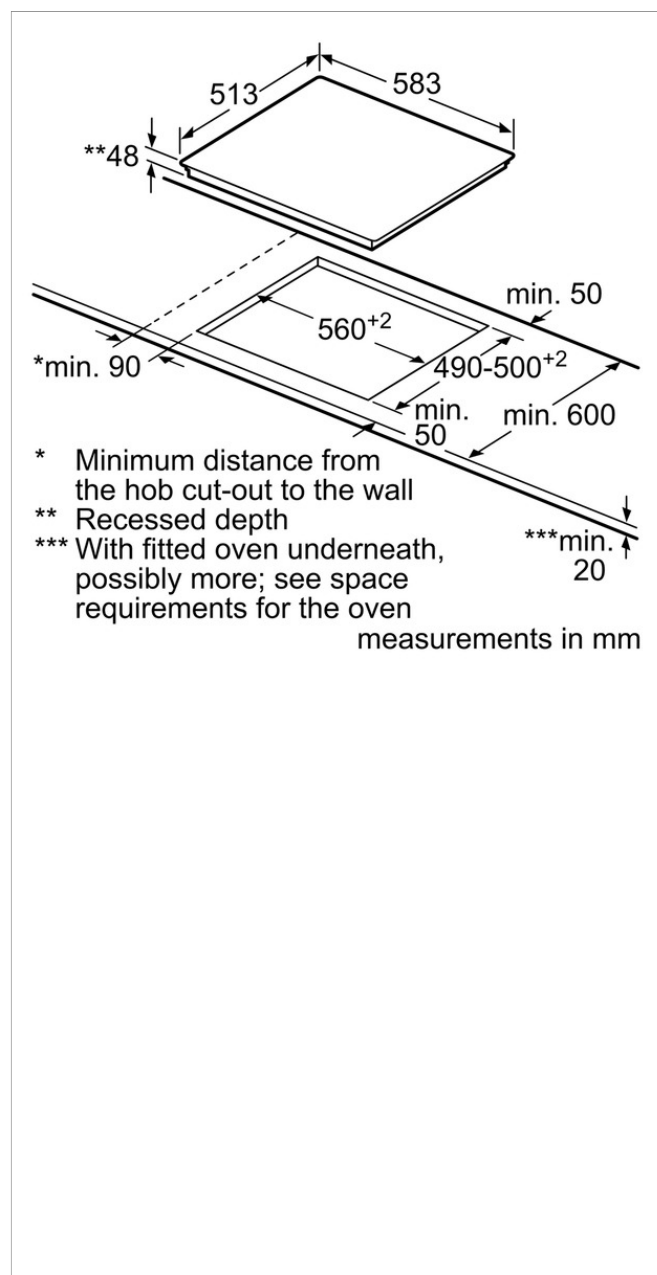

### Characteristics

Product name/family: Cooking zone ceramic  
Construction type: Built-in  
Energy input: Electric  
Total number of positions that can be used at the same time: 4  
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500  
Width of the product (mm): 583  
Dimensions of the product (mm): 48 x 583 x 513  
Net weight (kg): 7.0  
Gross weight (kg): 8.0  
Residual heat indicator: Separate  
Location of control panel: Hob front  
Basic surface material: Ceramic  
Color of surface: Black, Stainless steel  
Color of frame: Stainless steel  
Approval certificates: CE, VDE  
Sealed Burners: No  
heating with booster: Front left, Front right  
Power of 1st heating element (kW): 1.2  
Power of 2nd heating element (kW): 2  
Power of 3rd heating element (kW): 1.2  
Power of 4th heating element (kW): 0.8 ; 2.1  
Power of 1st heating element (kW in boost): 1.6  
Power of 4th heating element (kW in boost): 2.6

### Consumption and connection features

Electrical connection rating (W): 7400  
Gas connection rating (W):  
Current (A):  
Voltage (V): 220-240  
Frequency (Hz): 60; 50  
Universal Product Code:  
Main colour of product: Black  
Energy input: Electric  
Gas type:  
Alternative gas type:  
Approval certificates: CE, VDE  
Length of electrical supply cord (in):  
Plug type: no plug  
Required cutout/niche size for installation (in): x x  
Minimum distance from counter front (in):  
Minimum distance from rear wall (in):  
Appliance Dimensions (h x w x d) (in): + x x  
Dimensions of the packed product (in): 3.93 x 23.22 x 29.52  
Net weight (lbs): 16  
Gross weight (lbs): 18  
Total number of positions that can be used at the same time: 4  
Length electrical supply cord (cm):  
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500