




5RG64350 stainless steel

Frame design

60 cm, Ceramic hob

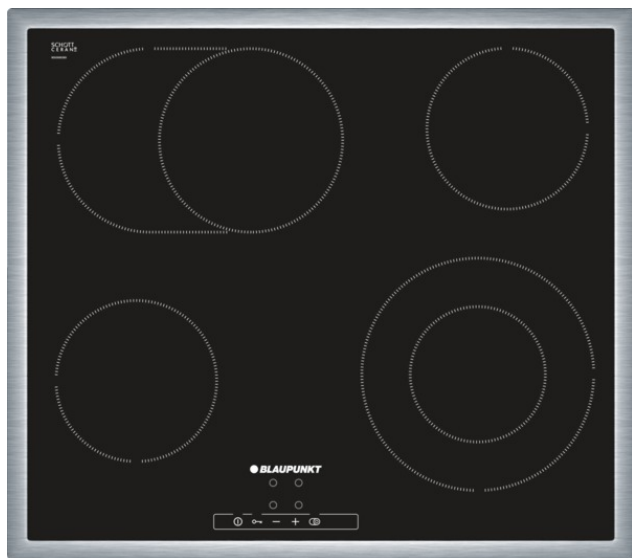

#### **5RG64350 Black**

##### **Design:**

- Frame design
- Ceramic glass

##### **Comfort:**

- 4 HighSpeed cooking zones, including:
- 1 with extendable oval zone
- 1 dual zone
- Zone extension activation with a Touch sensor on the hob
- TouchControl +/- (EasyTouch)
- 17 power levels
- Electronic display

##### **Environment+safety:**

- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Re Start function
- Power on indicator light
- Main switch


##### **Measurements:**

- Min. worktop thickness: 20 mm
- connecting value 6700 W
- Cooking zones
  - front left: Ø 145 mm, 1.2 KW
  - rear left: Ø 265 mm, 170 mm, 2.6 KW, 1.8 KW
  - rear right: Ø 145 mm, 1.2 KW
  - front right: Ø 120 mm, 210 mm, 0.75 KW, 2.2 KW

4251003100211



## 5RG64350 stainless steel Frame design 60 cm, Ceramic hob

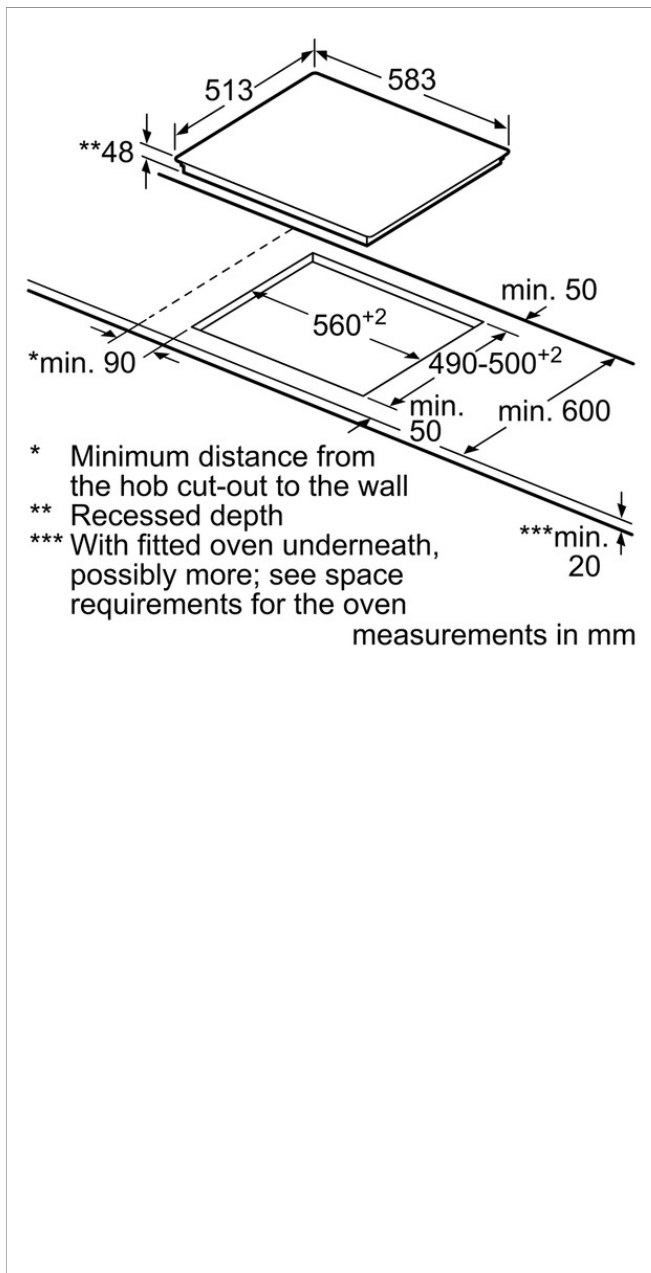

### Characteristics

Product name/family: Cooking zone ceramic  
Construction type: Built-in  
Energy input: Electric  
Total number of positions that can be used at the same time: 4  
Type of control setting devices: EasyTouch  
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500  
Width of the product (mm): 583  
Dimensions of the product (mm): 48 x 583 x 513  
Net weight (kg): 8.0  
Gross weight (kg): 8.0  
Residual heat indicator: Separate  
Location of control panel: Hob front  
Basic surface material: Ceramic  
Color of surface: Black, Stainless steel  
Color of frame: Stainless steel  
Approval certificates: CE, VDE  
Sealed Burners: No  
Power of 1st heating element (kW): 1.2  
Power of 2nd heating element (kW): 1.8 ; 2.6  
Power of 3rd heating element (kW): 1.2  
Power of 4th heating element (kW): 0.75 ; 2.2

### Consumption and connection features

Electrical connection rating (W): 6700  
Gas connection rating (W):  
Current (A):  
Voltage (V): 220-240  
Frequency (Hz): 50; 60  
Universal Product Code:  
Main colour of product: Black  
Energy input: Electric  
Gas type:  
Alternative gas type:  
Approval certificates: CE, VDE  
Length of electrical supply cord (in):  
Plug type: no plug  
Required cutout/niche size for installation (in): x x  
Minimum distance from counter front (in):  
Minimum distance from rear wall (in):  
Appliance Dimensions (h x w x d) (in): + x x  
Dimensions of the packed product (in): 3.93 x 23.22 x 29.52  
Net weight (lbs): 17  
Gross weight (lbs): 19  
Total number of positions that can be used at the same time: 4  
Length electrical supply cord (cm):  
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500  
Dimensions of the product (mm): 48 x 583 x 513  
Net weight (kg): 8.0