



5RH84351 stainless steel
80 cm, Ceramic hob
Frame design



5RH84351 Black

Design:

- Frame design
- Ceramic glass

Comfort:

- 4 HighSpeed cooking zones, including:
- 2 dual zones
- 1 with extendable oval zone
- Zone extension activation with a Touch sensor on the hob
- TouchControl MultiTouch
- Electronic display
- 17 power levels
- Switch off timer for every cooking zone
- Timer
- Re Start function
- Wipe protection function

Environment+safety:

- Main switch
- Power on indicator light
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Individual tunable energy consumption display

Quickness:

- PowerBoost function


Measurements:

- Min. worktop thickness: 20 mm
- connecting value 9300 W
- Cooking zones
 - front left: Ø 120 mm, 210 mm, 0.8 KW, 2.1 KW (max. power level 2.6 KW);
 - rear left: Ø 145 mm, 1.2 KW;
 - rear center: Ø 230 mm, 180 mm, 1.7 KW, 2.4 KW (max. power level 3.4 KW);
 - front right: Ø 170 mm, 265 mm, 2.6 KW, 1.8 KW;

4251003101256



5RH84351 stainless steel 80 cm, Ceramic hob Frame design

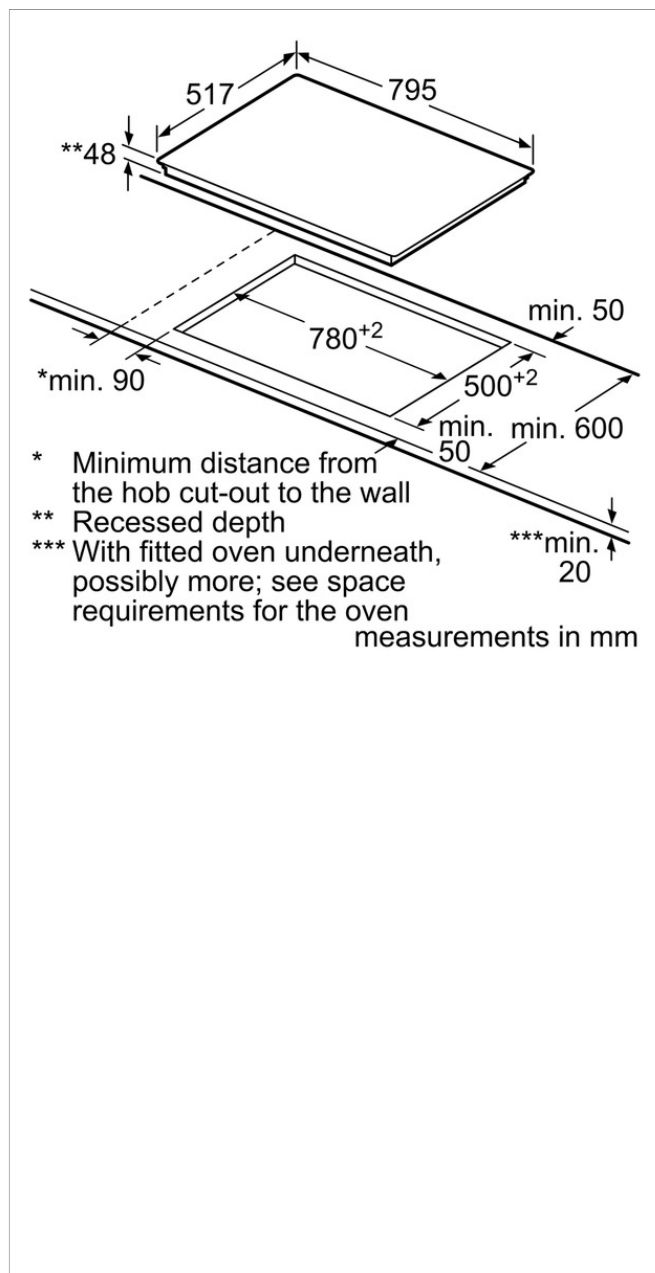

Characteristics

Product name/family: Cooking zone ceramic
Construction type: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD): 48 x 780-780 x 500-500
Width of the product (mm): 795
Dimensions of the product (mm): 48 x 795 x 517
Net weight (kg): 10.0
Gross weight (kg): 12.0
Residual heat indicator: Separate
Location of control panel: Hob front
Basic surface material: Ceramic
Color of surface: Black, Stainless steel
Color of frame: Stainless steel
Approval certificates: CE, VDE
Sealed Burners: No
heating with booster: Front left, Rear middle
Power of 1st heating element (kW): 2.1 ; 0.8
Power of 2nd heating element (kW): 1.2
Power of 3rd heating element (kW): 1.7 ; 2.4
Power of 5th heating element (kW): 1.8 ; 2.6
Power of 1st heating element (kW in boost): 2.6
Power of 3rd heating element (kW in boost): 3.4

Consumption and connection features

Electrical connection rating (W): 9300
Gas connection rating (W):
Current (A):
Voltage (V): 220-240
Frequency (Hz): 60; 50
Universal Product Code:
Main colour of product: Black
Energy input: Electric
Gas type:
Alternative gas type:
Approval certificates: CE, VDE
Length of electrical supply cord (in):
Plug type: no plug
Required cutout/niche size for installation (in): x x
Minimum distance from counter front (in):
Minimum distance from rear wall (in):
Appliance Dimensions (h x w x d) (in): + x x
Dimensions of the packed product (in): 3.93 x 24.40 x 44.48
Net weight (lbs): 23
Gross weight (lbs): 26
Total number of positions that can be used at the same time: 4
Length electrical supply cord (cm):
Required niche size for installation (HxWxD): 48 x 780-780 x 500-500